



**Distribution Information - New Product Introduction**



**Air Suspension Version**

**Fixed Roof**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Kerb Weight	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2486 - 2704	37.2	29.6
V6 7 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2486 - 2704	37.2	29.6
Dsl 5 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2494 - 2718	37.2	29.6
Dsl 7 Seat	4848	2009	1605	1612.5	1887	1837	1867	9.74	17.89	2494 - 2718	37.2	29.6

**Roof Bars**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Kerb Weight	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2486 - 2704	37.2	29.6
V6 7 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2486 - 2704	37.2	29.6
Dsl 5 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2494 - 2718	37.2	29.6
Dsl 7 Seat	4848	2009	1605	1612.5	1991	1941	1971	9.74	18.90	2494 - 2718	37.2	29.6

**With Antennae**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Mass Manual	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2486 - 2704	37.2	29.6
V6 7 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2486 - 2704	37.2	29.6
V8 5 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2486 - 2704	37.2	29.6
Dsl 5 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2494 - 2718	37.2	29.6
Dsl 7 Seat	4848	2009	1605	1612.5	1940	1890	1920	9.74	18.41	2494 - 2718	37.2	29.6

**Coil Spring Version**

**Fixed roof**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Kerb Weight	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V6 7 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
Dsl 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2494 - 2718	32.2	24.9
Dsl 7 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2494 - 2718	32.2	24.9

**Roof Rails**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Kerb Weight	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V6 7 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2486 - 2704	32.2	24.9
Dsl 5 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2494 - 2718	32.2	24.9
Dsl 7 Seat	4848	2009	1605	1612.5	1887	1887	1887	9.74	18.38	2494 - 2718	32.2	24.9

**With Antennae**

Model	Length	Width (Folded)	Front Track	Rear Track	Ride Height	Transit Parked Height	Transit Moving Height	Foot Print	Cube	Mass Manual	Approach	Departure
V6 5 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2486 - 2704	32.2	24.9
V6 7 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2486 - 2704	32.2	24.9
V8 5 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2486 - 2704	32.2	24.9
Dsl 5 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2494 - 2718	32.2	24.9
Dsl 7 Seat	4848	2009	1605	1612.5	1940	1940	1940	9.74	18.89	2494 - 2718	32.2	24.9



**UK / Road Transport - Safe Lashing Points  
Front Lashing Point 'T Hook' Fixing only**



**Rear lashing points- Open hook fixings to both sides**






## Deep Sea Ships Lashing

Remove Front cover if fitted, stow inside vehicle.  
Use plastic coated hooks /avoid metal to metal contact




Standard lashing arrangement - Front

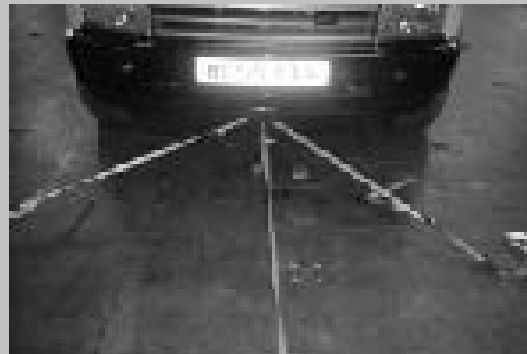

Athwartships / Ramps three point lashing arrangement - Front



**Deep Sea Ships Lashing – Cont'd**  
**Use lashing slots only - not customer recovery ring**

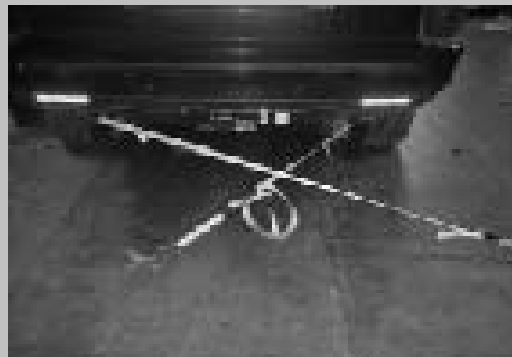

**Two point cross lashing**



**Rear left lashing point**



**Rear right lashing point**



## L322 Product Information

**Deep Sea Markets.  
Vehicle is fitted with a  
manual battery isolator**



**To operate, turn switch 1  
quarter turn at each place  
of rest or during shipment**





## Continental Lashing Methods

